AMBASSADOR Series Windows and Doors



w.intlwindow.com

Thermally Broken Aluminum




Style and Performance

The clean, contemporary design and features of the Ambassador aluminum windows and doors are unsurpassed in the industry. Durable aluminum frames are maintenance free and easy to install. State of the art ThermoTechTM extrusions are fully thermally broken to achieve maximum energy performance. Our security features include a stylish cam latch and a secondary night latch. The deluxe Delrin rollers ensure smooth and quiet operation with an adjustability that will ensure an airtight fit. The weep hole covers will minimize air and dust infiltration into your home.


Frame Finishes

DUAL COLOR OPTIONS: Our ThermoTech™ process enables you to customize both the exterior and interior colors.

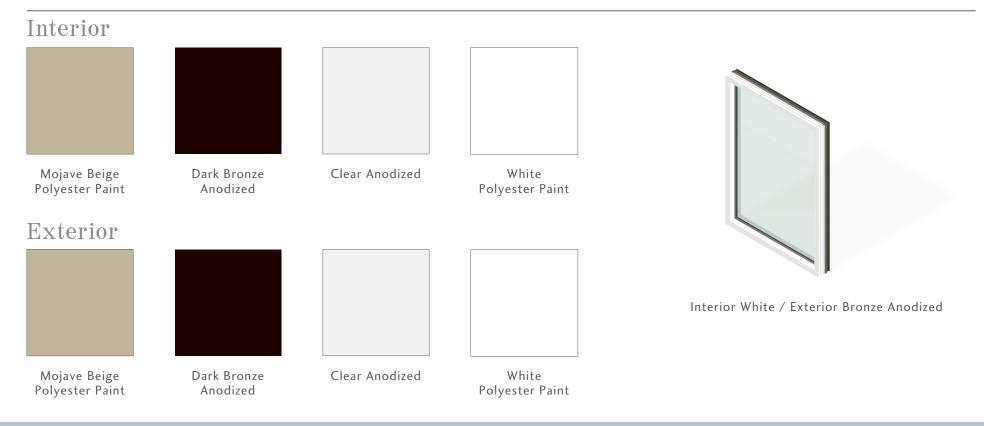




Sliding Windows

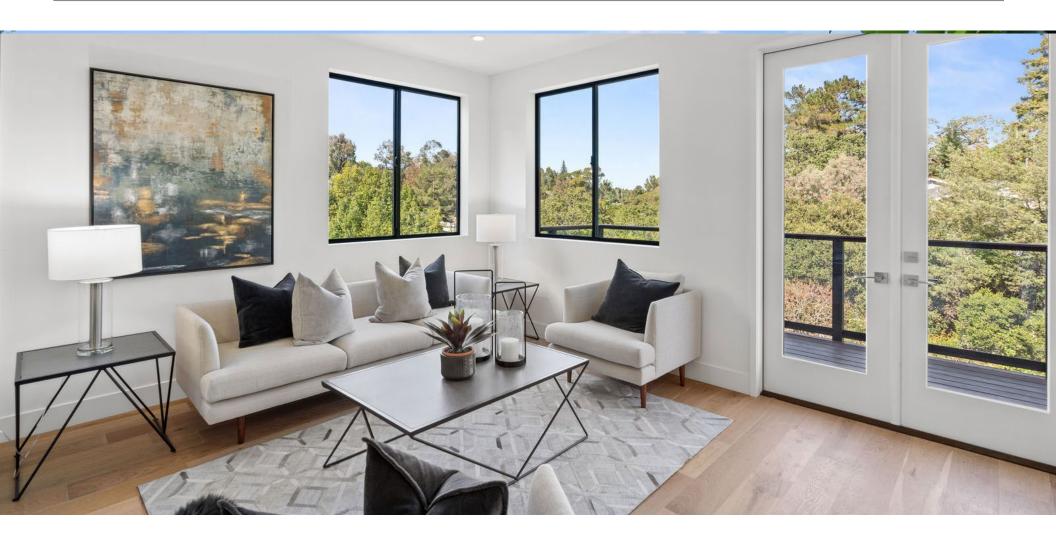



Horizontal Sliding Window Configurations

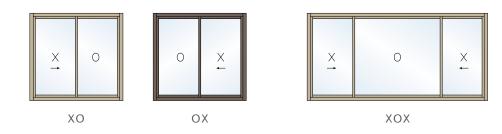

- 3/4" dual Low E glazing standard
- Even site line
- Handed latches locked in "down" position
- Anti-lift sash blocks
- Standard secondary night latch
- Weep hole covers minimize air and dust infiltration

Single Hung Window Configurations


0

Î



1/1





1/3 Vent

Twin 1/1 by 1/1



Triple 1/1 by 1/1 by 1/1

- 3/4" dual Low E glazing standard
- Even site line
- Tilt in sash for ease of cleaning
- Block and tackle balancers
- Retro-fit frame available
- Double weather-stripped panels reduce air and dust infiltration



Hinged Windows






Hinged Window Configurations

- 1" dual Low E glazing standard
- 2-3/4" Frame depth
- Full-flip folding handle
- Even site lines
- Butt hinges allow for larger sizes

Awning



















Type "A"

Type "2A"

Type "HB"

Type "HT"

Type "P"

Type "KT" Type "KB"

Combo Units

Casement
















Type "M"



Combo Units

Type "CL"

Type "CR"

Type "AL"

Type "2C"

Type "EL"

Type "ER"

Type "3C"






Picture and Special Shaped Windows





Picture and Special Shaped Windows


- 1" dual Low E glazing standard
- Clean site lines
- Meets light commercial ratings
- Exterior aluminum extruded stops

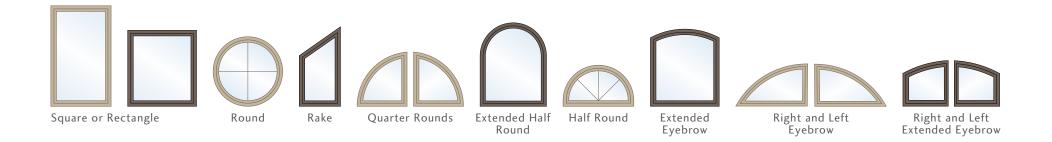



Multi Slide Doors


Designers and Architects love the thermal values the 8880 and 8881 provide, while homeowners embrace the slim lines that afford beautiful views.

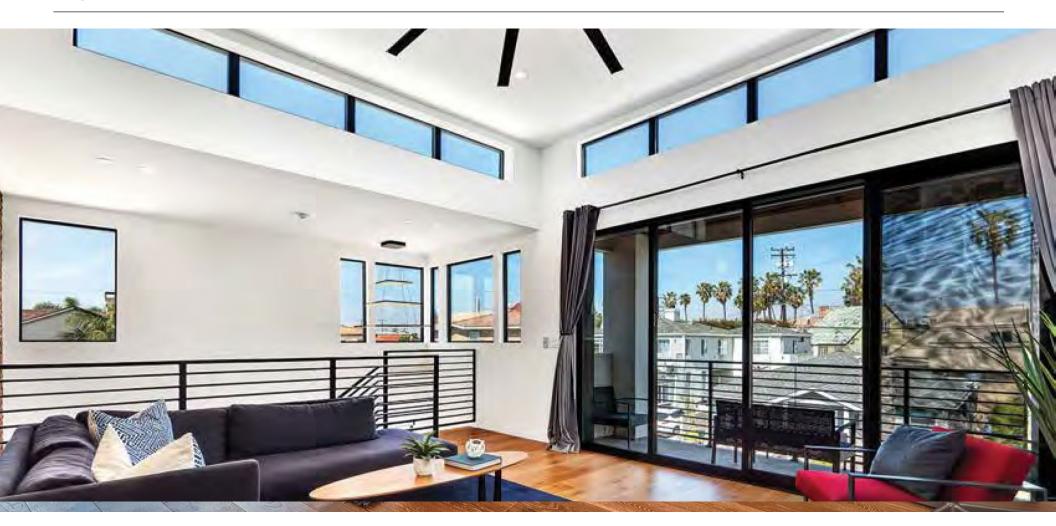



Multi Slide Door Configurations

Designers and Architects love the thermal values the 8880 and 8881 provide, while homeowners embrace the slim lines that afford beautiful views.

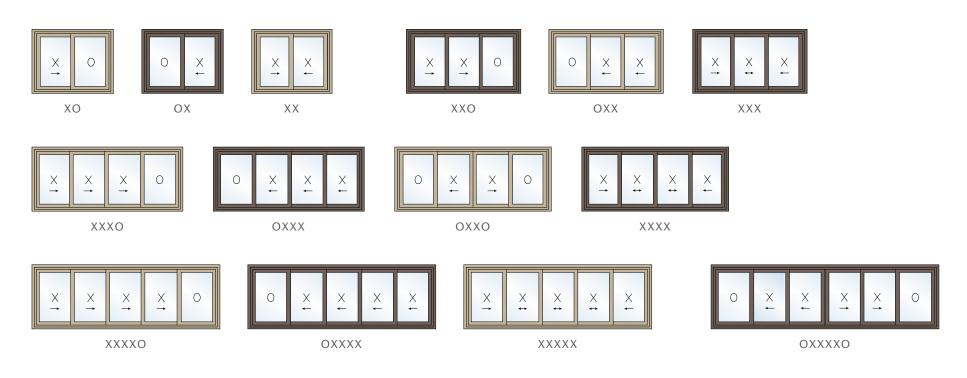

8880 Series

- Maximum panel size: 4' x 8'
- 1-13/16" Rollers
- Attractive "C" handle
- Stainless steel rollers available


8881 Series

- Maximum panel size: 5' x 9'
- Quad door roller system
- Flush pull handle available in brushed nickel finish
- Stainless steel rollers available



Sliding Patio Doors


This thermally broken aluminum door is available in numerous configurations with the style and performance features of the Ambassador Series.

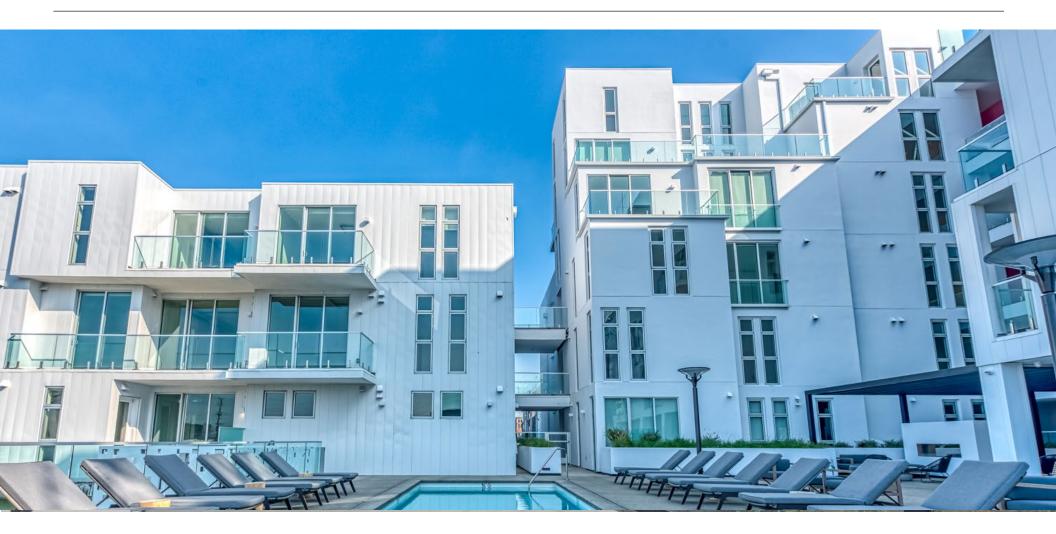



Sliding Patio Door Configurations

This thermally broken aluminum door is available in numerous configurations with the style and performance features of the Ambassador Series.

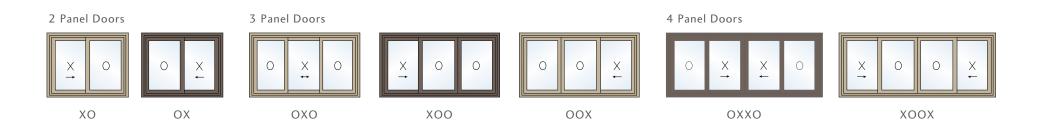

- Mortise recessed lock system with ergonomically designed "C" handle
- Standard 1-13/16" diameter sealed ball bearing rollers
- 1" Low E dual glazing standard
- Optional key lock
- Optional stainless steel rollers



Decorative Glass Options

Light and privacy with textured and tinted glass. Some of our popular choices:



Additional Glass Options

LAMINATED GLASS: Two pieces of glass with an inner layer of transparent plastic for safety and sound reduction.

TEMPERED GLASS: Strong, break-resistant safety glass. Breaks into small pieces when shattered.

ARGON GAS: An inert, non-toxic gas used in insulating glass units to reduce heat transfer.


ENERGY SHIELD XTREME GLASS: Blocks more heat and ultraviolet light.

ILE GLASS: A hard coat of Low E on the 4th surface.




Grid Options

Select sculptured or flat grid designs in a variety of patterns for custom looks.

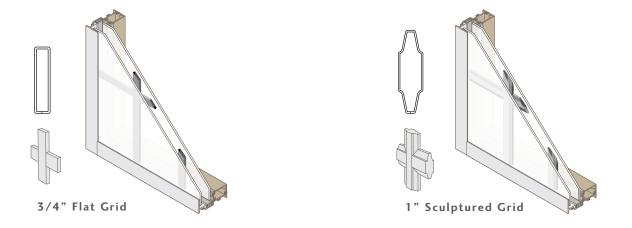


Typical Grid Patterns

Some of the more common patterns shown. Custom patterns available.

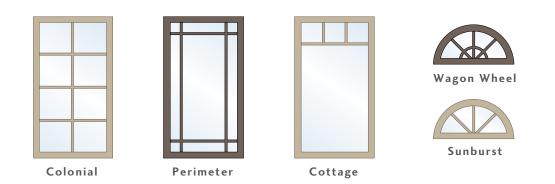



Frame Mounting Options

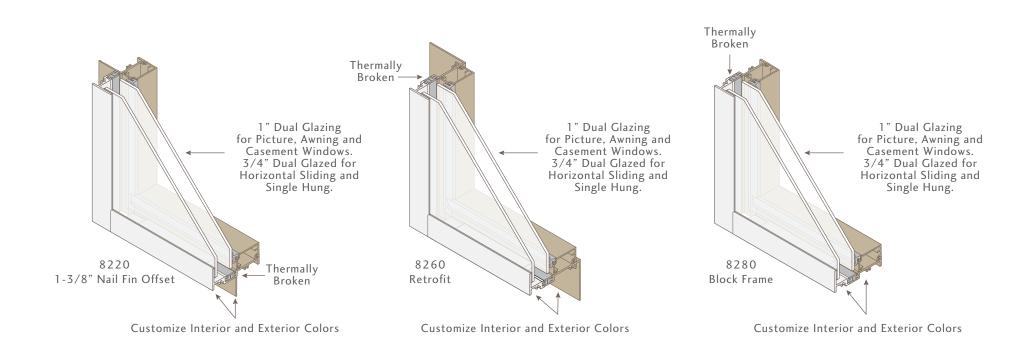



Lifetime Warranty*

International Window Company (IWC) warrants its window and door products to be free from defects in material or workmanship that significantly impair their proper operation for the lifetime of your home for as long as you own it.

Coverage:

The lifetime coverage of this warranty applies to original owners of single-family homes and owners of single-family homes who purchase IWC products for remodeling or replacement. Proof of purchase and of continuous ownership will be required.

- * For commercial buildings, multi-family dwellings, apartments and other types of buildings, the warranty period shall be ten (10) years following the date of purchase.
- * For Jalousie products, the warranty period shall be ten (10) years following the date of purchase.

Limitations:

This warranty is limited, may not be assigned or transferred and does not include component failure due to improper installation, application or use, abuse, abnormal stresses due to vibration, heat and settlement, or acts of God. IWC is not liable for natural weathering of exterior finishes or for corrosion in highly corrosive environments. All glass warranties are void if any sun control film is applied to the glass surface. Insulating unit seal failure resulting from glass breakage is also not covered.

Remedy:

IWC will, at its sole discretion, repair or replace free of charge, including parts and labor, any window or door proven to be defective in material or workmanship during the applicable warranty period. If IWC is unable to provide replacement, or if repair is not commercially practical, IWC will refund the original purchase price.

Claims:

To claim service under this warranty, the homeowner shall provide written notification of the defect along with dated proof of purchase and proof of original home ownership to your nearest IWC facility or authorized IWC dealer. IWC reserves the right to conduct an on-site inspection of defective products in place and as originally installed.

Other Conditions:

THIS WARRANTY IS EXPRESSLY IN LIEU OF ALL OTHER ORAL OR WRITTEN WARRANTIES, LIABILITIES OR OBLIGATIONS. IN NO EVENT SHALL IWC BE LIABLE FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES OF ANY KIND, INCLUDING ANY DAMAGE TO THE BUILDING, ITS CONTENTS OR ANY PERSON THEREIN, RESULTING FROM THE BREACH OF ANY WARRANTY SET FORTH HEREIN. SOME STATES DO NOT ALLOW LIMITATIONS ON OR THE EXCLUSION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE EXCLUSIONS MAY NOT APPLY TO YOU!

This limited warranty gives you specific legal rights, and you may also have other rights that vary from state to state.

This warranty applies to products sold after July 1, 2011.

International Window Company • www.intlwindow.com Northern CA 800-624-0990 • Southern CA 800-477-4032

AMBASSADOR Thermal Aluminum Windows and Doors





Please contact us at: Southern CA Phone: 800-477-4032 Northern CA Phone: 800-624-0990 Email: info@intlwindow.com Website: www.intlwindow.com