GENTRY Series Windows and Doors







Quality and Performance

The Gentry Series is the most complete vinyl line on the market today and is rated C35, suitable for taller buildings. This line includes a selection of awning, casement, horizontal sliding, single and double hung, bay and bow and of course picture windows to match. 7/8" dual Low E glazing standard or optional 1-1/8" triple glazing and four frame mounting options offer an ideal solution for either new construction or replacement projects.

Frame Finishes

These two stock finishes are standard to keep lead times at a minimum. Contact your sales representative for custom colors.




Colors shown are approximate due to printing limitations.



Hinged Window Operating Styles

Available with standard 7/8" dual Low E glazing or optional 1-1/8" triple glazing and four frame mounting options.

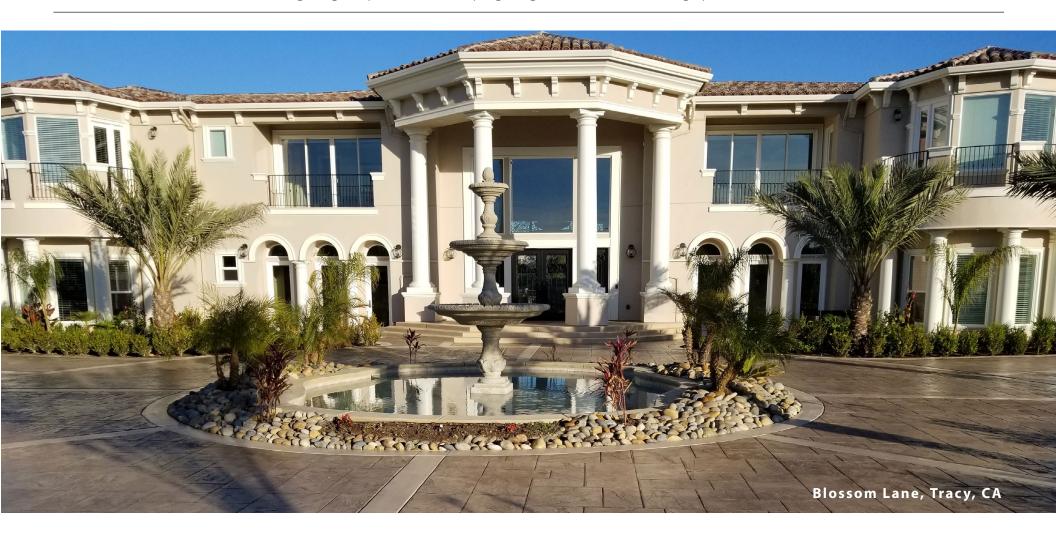

Page 3 of 19 www.intlwindow.com




Hinged Window Configurations

Butt hinges and multi point hardware are standard for outswing awning and casement windows. Both styles feature a sleek low profile latch integrated into a double walled pull rail for a clean modern look that does not interfere with the even site lines. The hold open feature makes it easy spot an unlatched window and the full pull rails are designed for easy operation.

Awning



Type "A"



Type "2A"



Type "HB"



Type "KB"




Type "HT"




Type "KT"



Γ" Type "P"



P"



Combo Units


Casement



Type "CL"



Type "CR"




Type "2C"



Type "EL"



Type "ER"



Type "3C"



Type "M"



Type "CPW"




Combo Units



Single Hung Operating Styles

Available in side load and tilt out styles with standard 7/8" dual Low E glazing or optional 1-1/8" triple glazing and four frame mounting options.

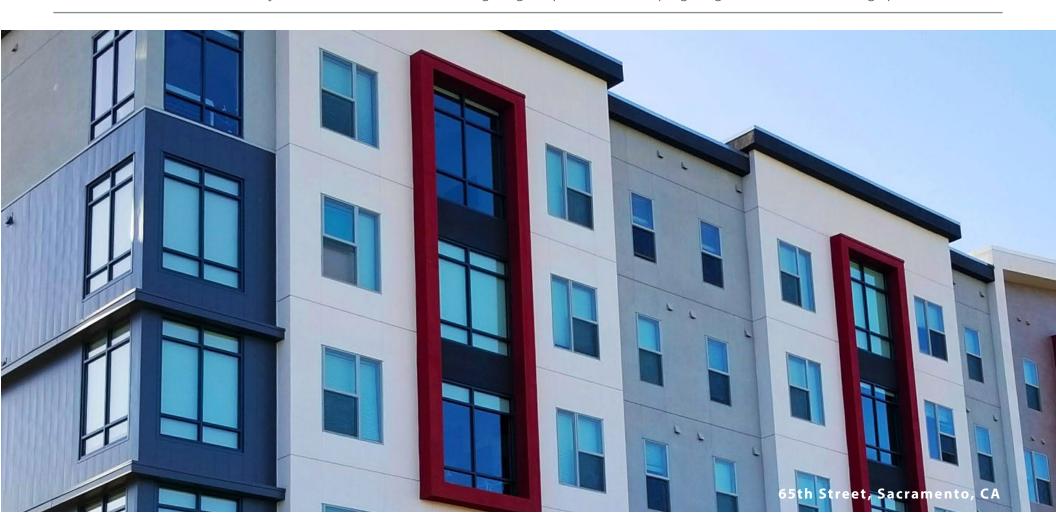

Page 5 of 19 www.intlwindow.com




Single Hung Window Configurations

Both Side Load and Tilt Out styles feature a sleek low profile latch integrated into a double walled pull rail for a clean modern look that does not interfere with the even site lines. The hold open feature makes it easy spot an unlatched window and the full pull rails are designed for easy operation.


Side Load Single Hung

• Features anti-lift sash blocks and oversized guides for easy vent removal and cleaning.

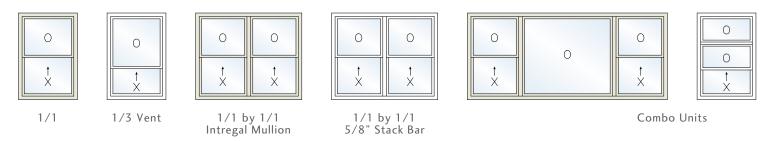

Tilt Out Single Hung

• Tilt in design allows for easy cleaning and inverted balance with built in shoe for easy vent removal.

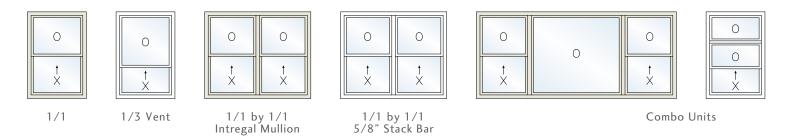


Page 6 of 19 www.intlwindow.com



Double Hung Operating Styles


Available with standard 7/8" dual Low E glazing or optional 1-1/8" triple glazing and four frame mounting options.

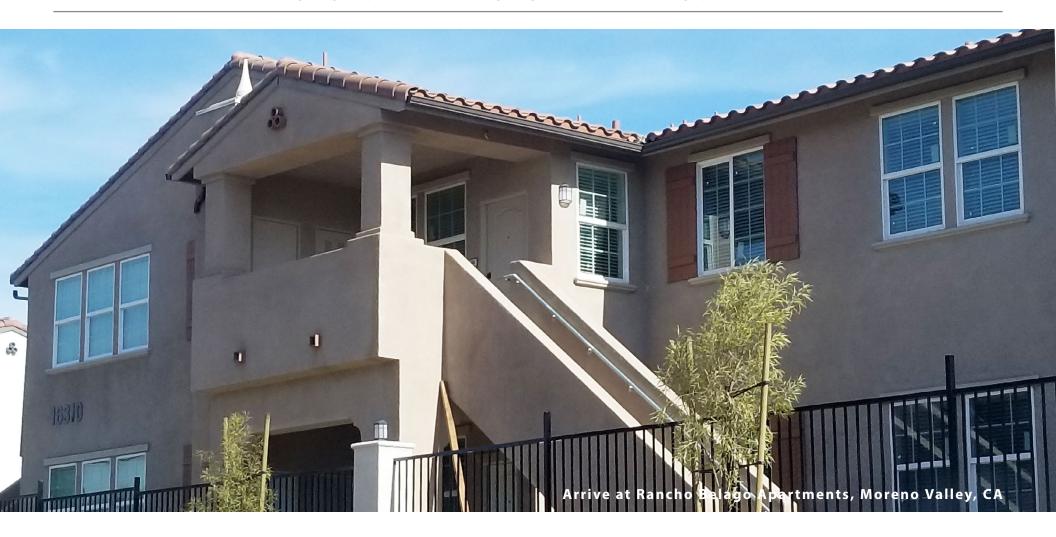

Page 7 of 19 www.intlwindow.com



Double Hung Window Configurations

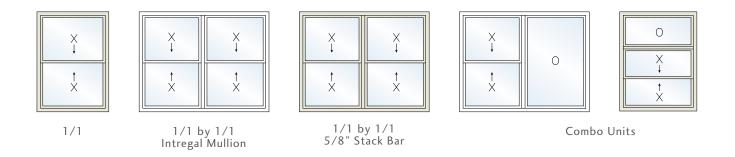

- Even Site Lines
- · Both vents tilt in for ease of cleaning
- Low profile latch is integrated into a double walled pull rail for a clean modern look that does not interfere with site lines
- Hold open feature makes it easy to spot an unlatched window
- Pull rail runs full length for easy operation
- Inverted balance with built in shoe for easy vent and balance removal



Horizontal Sliding Operating Styles


Available with standard 7/8" dual Low E glazing or optional 1-1/8" triple glazing and four frame mounting options.



Page 9 of 19 www.intlwindow.com



Horizontal Sliding Window Configurations

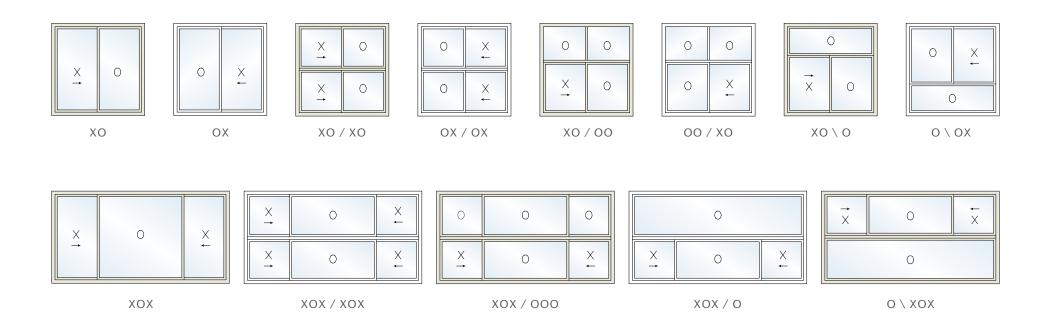


- Even site lines
- Sleek low profile latch with "hold open" feature to easily spot an unlatched window is integrated into a double walled pull rail for a clean modern look
- Pull rail runs full length for easy operation
- Secondary ventilation lock that will meet security standards
- Standard oversized wheels with stainless steel axles provide a smooth rolling window with improved operating force
- Rollers have a 3 position height adjustment for ease of installation

Page 10 of 19 www.intlwindow.com



Picture Window Styles


Available with standard 7/8" dual Low E glazing or optional 1-1/8" triple glazing and frame options to match both the hinged and sliding style windows.

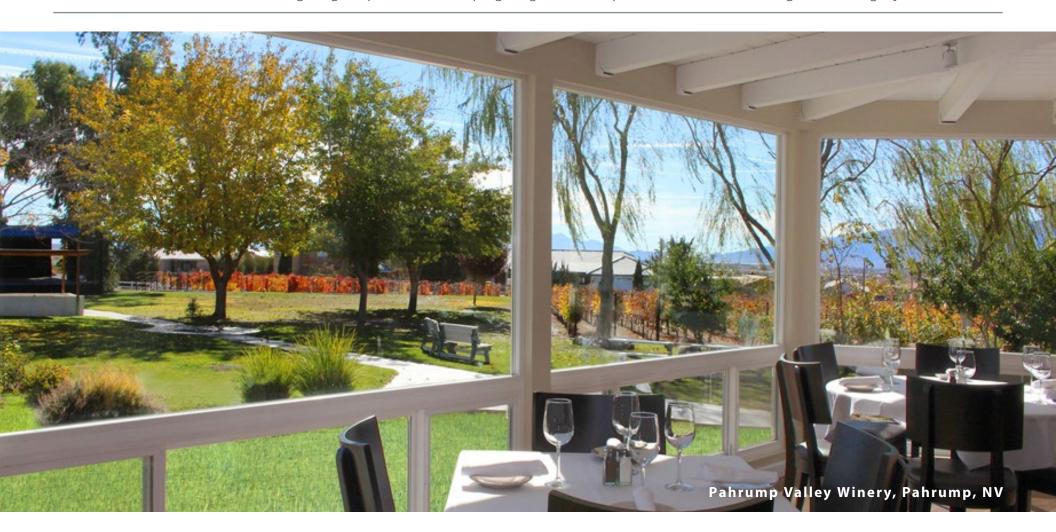

Page 11 of 19 www.intlwindow.com



Picture and Special Shaped Windows

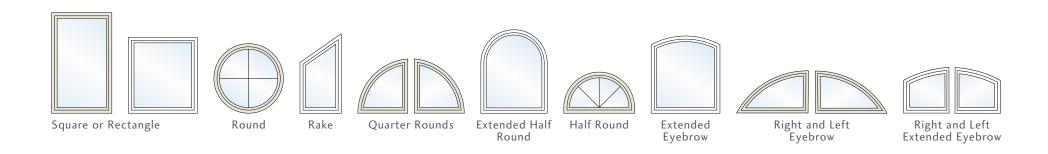

The 5400 Series windows are available in the following frame mounting options for hinged and sliding operating styles with picture windows to match.

Series Number	Standard Glass Thickness	Optional Glass Thickness	Frame Width	Frame Type
5420	7/8" Dual Low E Glazing	1-1/8" Triple Glazed	3-1/4"	Nail On Frame with 1-3/8" Set Back
5421	7/8" Dual Low E Glazing	1-1/8" Triple Glazed	3-1/4"	Nail On Frame with 1" Set Back
5460	7/8" Dual Low E Glazing	1-1/8" Triple Glazed	3-1/4"	Flush Fin Adaptor
5480	7/8" Dual Low E Glazing	1-1/8" Triple Glazed	3-1/4"	Block Frame


Page 12 of 19 www.intlwindow.com

GENTRY 5900 Series Premium Vinyl Doors



5900 Sliding Doors

Heavy multi-chamber frame with adjustable tandem rollers, multi-point locking and stainless steel track ensure smooth operation, durability and security.

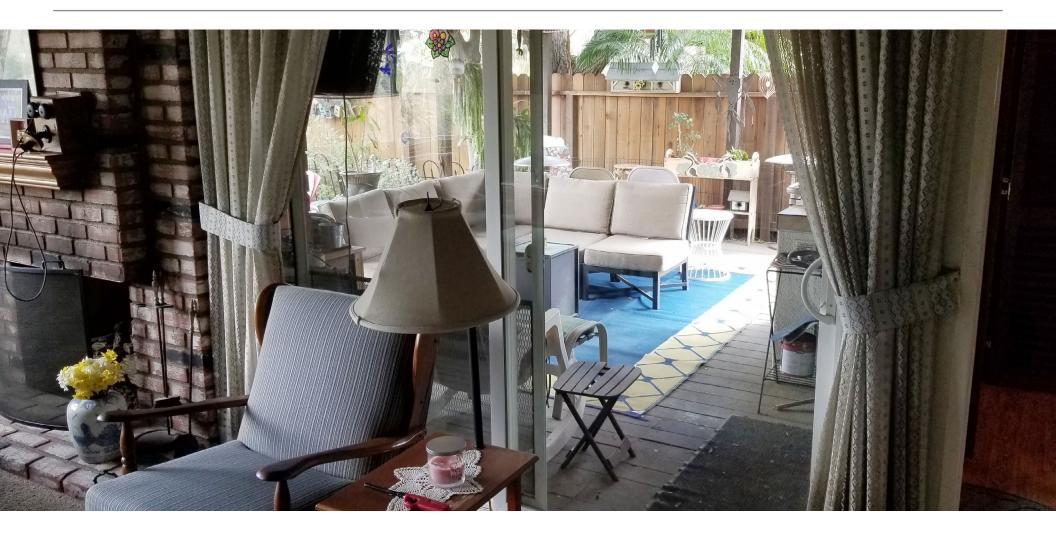


Page 13 of 19 www.intlwindow.com

GENTRY 5900 Series Premium Vinyl Doors



5900 Sliding Door Configurations



Series Number	Standard Glass Thickness	Frame Width	Frame Type
5920	3/4" Dual Low E Glazing	5-1/2"	Nail On Frame with 1-3/8" Set Back
5921	3/4" Dual Low E Glazing	5-1/2"	Nail On Frame with 1" Set Back
5960	3/4" Dual Low E Glazing	5-1/2"	Flush Fin Adaptor
5980	3/4" Dual Low E Glazing	5-1/2"	Block Frame

- Energy efficient, durable and secure
- Heavy multi-chamber frame
- Full miter welded frame and sash
- 4-5/8" extruded stile and rails
- Adjustable tandem rollers
- Stainless steel track
- Door is reversible in the field

Page 14 of 19 www.intlwindow.com



Decorative Glass Options

Light and privacy with textured and tinted glass. Some of our popular choices:



Additional Glass Options

LAMINATED GLASS: Two pieces of glass with an inner layer of transparent plastic for safety and sound reduction.

TEMPERED GLASS: Strong, break-resistant safety glass. Breaks into small pieces when shattered.

ARGON GAS: An inert, non-toxic gas used in insulating glass units to reduce heat transfer.

ENERGY SHIELD XTREME GLASS: Blocks more heat and ultraviolet light.


ILE GLASS: A hard coat of Low E on the 4th surface.


Page 15 of 19 www.intlwindow.com




Grid Options

Select sculptured or flat grid designs in a variety of patterns for custom looks.







Typical Grid Patterns

Some of the more common patterns shown. Custom patterns available.



Perimeter





Sunburst



Wagon Wheel


age 16 of 19 www.intlwindow.com





Frame Mounting Options

Sliding Fixed Options

Shown with Optional 1-1/8" Triple Glazing, 7/8" Dual Low E Glazing Standard.













Casement Fixed Options

Shown with Standard 7/8" Dual Low E Glazing, 1-1/8" Triple Glazing Optional.









Page 17 of 19 www.intlwindow.com



Lifetime Warranty*

International Window Company (IWC) warrants its window and door products to be free from defects in material or workmanship that significantly impair their proper operation for the lifetime of your home for as long as you own it.

Coverage:

The lifetime coverage of this warranty applies to original owners of single-family homes and owners of single-family homes who purchase IWC products for remodeling or replacement. Proof of purchase and of continuous ownership will be required.

- * For commercial buildings, multi-family dwellings, apartments and other types of buildings, the warranty period shall be ten (10) years following the date of purchase.
- * For Jalousie products, the warranty period shall be ten (10) years following the date of purchase.

Coverage for Glass Breakage:

For Gentry 5400 Series products only, the Lifetime Warranty will extend to glass breakage, including tempered glass, unless attributable to acts of nature, (e.g. hurricane, fire, etc.) building settling, vandalism, civil disorder, structural failures of walls or foundation or improper installation, storage, applied films or handling. Specialty glass such as Laminated, etc. are not covered under this glass breakage warranty. This glass breakage warranty applies to products sold after October 1, 2015.

Limitations:

This warranty is limited, may not be assigned or transferred and does not include component failure due to improper installation, application or use, abuse, abnormal stresses due to vibration, heat and settlement, or acts of God. IWC is not liable for natural weathering of exterior finishes or for corrosion in highly corrosive environments. All glass warranties are void if any sun control film is applied to the glass surface. Insulating unit seal failure resulting from glass breakage is also not covered.

Remedy:

IWC will, at its sole discretion, repair or replace free of charge, including parts and labor, any window or door proven to be defective in material or workmanship during the applicable warranty period. If IWC is unable to provide replacement, or if repair is not commercially practical, IWC will refund the original purchase price.

Claims:

To claim service under this warranty, the homeowner shall provide written notification of the defect along with dated proof of purchase and proof of original home ownership to your nearest IWC facility or authorized IWC dealer. IWC reserves the right to conduct an on-site inspection of defective products in place and as originally installed.

Other Conditions:

THIS WARRANTY IS EXPRESSLY IN LIEU OF ALL OTHER ORAL OR WRITTEN WARRANTIES, LIABILITIES OR OBLIGATIONS. IN NO EVENT SHALL IWC BE LIABLE FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES OF ANY KIND, INCLUDING ANY DAMAGE TO THE BUILDING, ITS CONTENTS OR ANY PERSON THEREIN, RESULTING FROM THE BREACH OF ANY WARRANTY SET FORTH HEREIN. SOME STATES DO NOT ALLOW LIMITATIONS ON OR THE EXCLUSION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES. SO THE ABOVE EXCLUSIONS MAY NOT APPLY TO YOU!

This limited warranty gives you specific legal rights, and you may also have other rights that vary from state to state.

This warranty applies to products sold after July 1, 2011.

International Window Company • www.intlwindow.com Northern CA 800-624-0990 • Southern CA 800-477-4032

age 18 of 19 www.intlwindow.com





Please contact us at:

Southern CA Phone: 800-477-4032 **Northern CA Phone:** 800-624-0990

Email: info@intlwindow.com
Website: www.intlwindow.com

Page 19 of 19 www.intlwindow.com