


# 4750 Multi-Slide Door

Thermally Broken Aluminum



**Create the true experience of indoor outdoor living with industry-leading aluminum multi-slide patio doors.**

Our stacking multi-slide patio doors feature narrow, uniform sightlines to help you achieve your exact project vision.

## SPECIFICATIONS

### Frame Sizes

- Width: Min. 51", Max. 845.43"
- Height: Min. 42", Max. 143.5"

### Panel Sizes

- Max. square footage: 50 sq. ft.
- Width: Min. 25.5", Max. 72"
- Height: Min. 40", Max. 141.5"

### Configurations

- Stacking, Bi-Parting
- Pocketing
- 90-Degree Corner
- 270-Degree Corner

### Attachment Method

- Block Frame

### Performance

- U-Factor: 0.28-0.33
- SHGC: 0.22-0.29

### Stucco Returns

- 1"
- 1-3/8"

### Sightline

- 2.43"

### Sills

- Flush – 3/4"
- Standard – 1-1/2"

\*51" is the min. width for 2-panel doors. 845.43" is the max. width for bi-parting pocket doors. 353.13" is the max. width for one-way stacking, not including 90-degree corner doors. Please see your local rep for more information.

# 4750 Multi-Slide Door

Thermally Broken Aluminum



## FRAME FINISHES



Satin Anodized

Black Anodized

White Painted

Fossil Painted

## HARDWARE



Contemporary Pull Handle



Flush Mount Handle



Premium Adjustable Quad Rollers

## HARDWARE FINISHES



Satin Nickel (F42-R)




Matte Black (F9714)




White

## SILLS




Flush - 3/4"



Performance - 1-1/2"

## CROSS SECTION

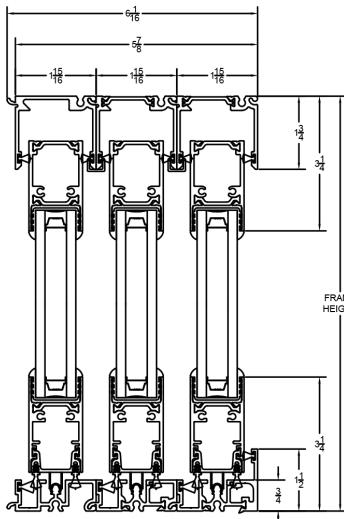

Multi-Slide Door Cross Section

