

4750 Pivot Door

Thermally Broken Aluminum



Add timeless sophistication to your design with the true modern styling of an aluminum pivot door.

With superior performance and options for every design, our pivot door solutions achieve your design vision without compromise.

4750 Pivot Door

Thermally Broken Aluminum



SPECIFICATIONS

Door Frame Sizes

- Max: 71.5"x143.5" Frame
- Min: 47.5"x71.5" Frame

Product Dimensions

- Standard: 5-1/4" bottom rail with 3-1/4" stiles and top rail
- Custom: 5-1/8" stiles and top rail

Configurations

- Left- or right-handed
- Interior or exterior pivot

Attachment Method

- Block Frame

Performance

- U-Factor 0.28-0.41
- SHGC 0.15-0.25

FRAME FINISHES



Satin
Anodized



Black
Anodized

HARDWARE

- Standard: 48" or 72" Ladder Pull Bar
- Roller Catches with Deadbolt
- FritsJurgens Pivot System
- Optional Schlage Electronic Deadbolt

HARDWARE FINISH OPTIONS



Satin Nickel
(F42-R)




Matte Black
(F9714)

CROSS SECTION



Ladder Pull

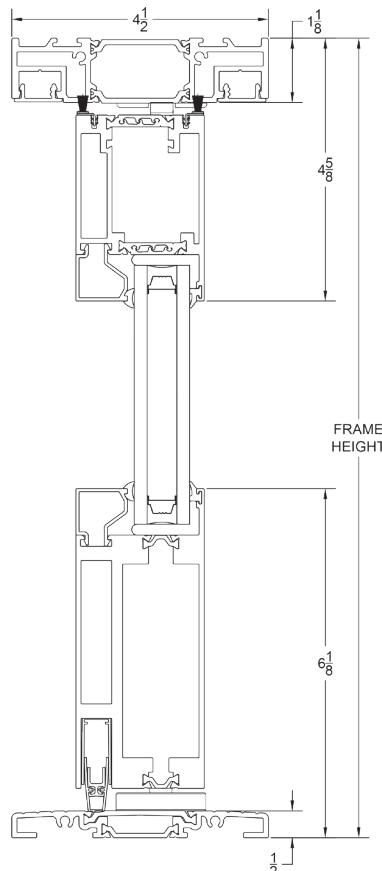

Pivot Door Cross Section